


Technical Information Polycrystalline PV-Module

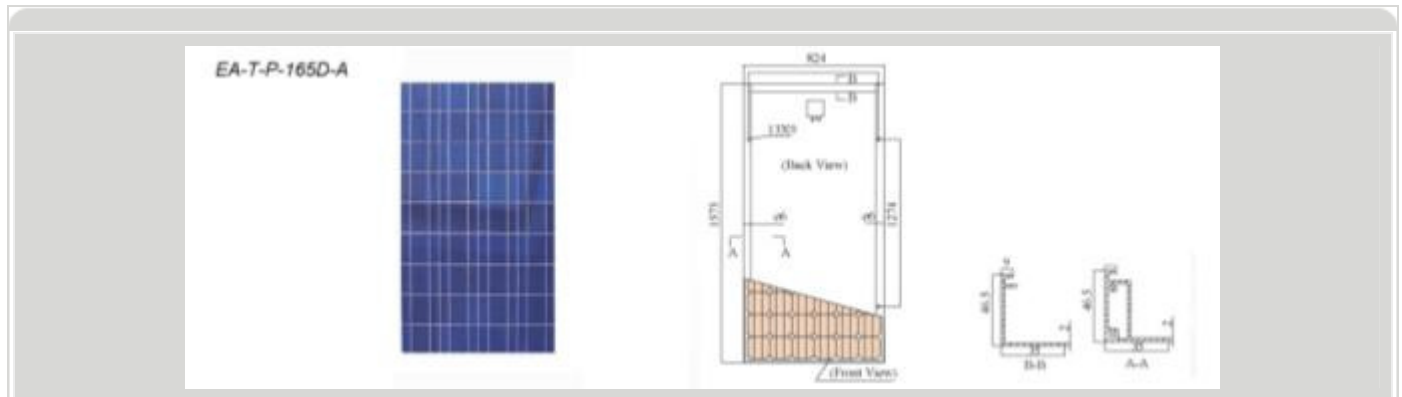

polycrystalline silicon pv module

No.	rated power W_p (W)	optimum operation voltage V_{mp} (V)	optimum operation current I_{mp} (A)	short- circuit current I_{sc} (A)	open- circuit voltage V_{oc} (V)	module size L*W*H (mm)	weight (Kg)
EA-T-P-175DJ	175	23.5 ± 0.5	7.45 ± 0.20	8.34 ± 0.20	29 ± 0.5	1316/992/46	16
EA-T-P-165DJ	165	23 ± 0.5	7.02 ± 0.20	7.82 ± 0.20	28.5 ± 0.5	1316/992/46	16
EA-T-P-155DJ	155	22.6 ± 0.5	6.86 ± 0.20	7.63 ± 0.20	28.3 ± 0.5	1316/992/46	16
EA-T-P-175D-A	175	35.5 ± 0.5	4.93 ± 0.20	5.52 ± 0.20	44.0 ± 0.5	1573/824/46.5	16.3
EA-T-P-165D-A	165	35 ± 0.5	4.65 ± 0.20	5.21 ± 0.20	43.5 ± 0.5	1573/824/46.5	16.3
EA-T-P-155D-A	155	17.5 ± 0.5	4.58 ± 0.20	5.10 ± 0.20	42.5 ± 0.5	1573/824/46.5	16.3
EA-T-P-125DJ	125	17 ± 0.5	7.15 ± 0.20	7.80 ± 0.20	22.0 ± 0.5	1476/650/46	11
EA-T-P-120D	120	17 ± 0.5	7.06 ± 0.20	7.70 ± 0.20	21.5 ± 0.5	1476/650/46	11
EA-T-P-100D	100	17.5 ± 0.5	5.89 ± 0.20	6.42 ± 0.20	21.5 ± 0.5	1236/650/46	10
EA-T-P-85DJ	85	17 ± 0.5	4.86 ± 0.20	5.45 ± 0.20	22.0 ± 0.5	1000/650/28	8.1
EA-T-P-80D	80	17.5 ± 0.5	4.71 ± 0.20	5.20 ± 0.20	21.5 ± 0.5	1000/650/28	8
EA-T-P-75DJ	75	17.5 ± 0.5	4.30 ± 0.15	4.76 ± 0.15	22.0 ± 0.5	1176/531/28	7
EA-T-P-70D	70	17 ± 0.5	4.14 ± 0.20	4.55 ± 0.20	21.5 ± 0.5	1176/531/28	7
EA-T-P-65DJ	65	17.5 ± 0.5	3.72 ± 0.15	4.11 ± 0.15	22.0 ± 0.5	776/650/28	6
EA-T-P-60D	60	17 ± 0.5	3.54 ± 0.20	3.90 ± 0.20	21.5 ± 0.5	776/650/28	6
EA-T-P-55DJ	55	17.5 ± 0.5	3.04 ± 0.15	3.36 ± 0.15	22.0 ± 0.5	856/531/28	5.5
EA-T-P-50D	50	17 ± 0.5	2.95 ± 0.20	3.25 ± 0.20	21.5 ± 0.5	856/531/28	5.6
EA-T-P-40D	40	17 ± 0.5	2.36 ± 0.15	2.60 ± 0.15	21.5 ± 0.5	541/650/28	3.8
EA-T-P-20D	20	17 ± 0.5	1.18 ± 0.10	1.30 ± 1.10	21.5 ± 0.5	556/346/28	2.4
EA-T-P-10D	10	17 ± 0.5	0.59 ± 0.05	0.65 ± 0.05	21.5 ± 0.5	301/356/28	1.4
EA-T-P-5D	5	17 ± 0.5	0.29 ± 0.05	0.33 ± 0.05	21.5 ± 0.5	276/266/28	1

ESW

Energy Systems Wieder
Rathausgasse 5
A-7311Neckenmarkt, Austria

Tel: 0043 (0) 676 5571701

Web: www.eswieder.eu

Email: office@eswieder.eu